

OVARM1 – INSTRUCTION MANUAL

TOOLS REQUIRED

- Phillips Head Screw Driver
- Stud Finder for Drywall Installation
- Electric Drill and 5/16" (8mm) masonry bit for concrete/brick installation

HARDWARE INCLUDED

- | | |
|-----------------------------|---------------------|
| (A) 1 7/8" Drywall Screw x2 | (D) M4x30mm Bolt x4 |
| (B) Concrete Anchor x2 | (E) 3/4" Spacer x4 |
| (F) Security Bolt x1 | (G) Allen Wrench x1 |
| (C) M4x12mm Bolt x4 | |

STEP 1: MOUNTING THE WALL PIECE

Drywall Installation

IMPORTANT: The weight of the LCD requires installation into a wood stud. Failure to do so may result in damage or injury.

Use a stud finder to locate a wood stud where you want to install your mount. It is recommended that you verify the location of the stud using a small nail or an awl. You should use the center of the stud. After the stud has been located, place the wall piece against the wall with the hook towards the bottom. Secure the wall piece using one Drywall Screw (A), but do not completely tighten yet. Using the integrated bubble guide, carefully adjust the wall piece until it is level. Insert the remaining screw and tighten both screws.

Concrete/Brick Installation

Begin by placing the wall piece into position against the wall with the hook towards the bottom. Using the integrated bubble guide to keep it level, mark off the holes that will be used for securing the mount and place the wall piece aside. Next, drill holes using an electric drill and 5/16" (8mm) masonry bit. Remove any excess dust from the holes and insert a Concrete Anchor (B) into each hole. If necessary, use a hammer to lightly tap each anchor into place so that they are flush with the wall. Once both anchors are in place, put the wall piece back into position. Attach the wall piece using the Drywall Screws (A) provided. Make sure both screws are secure.

FIG. 1A


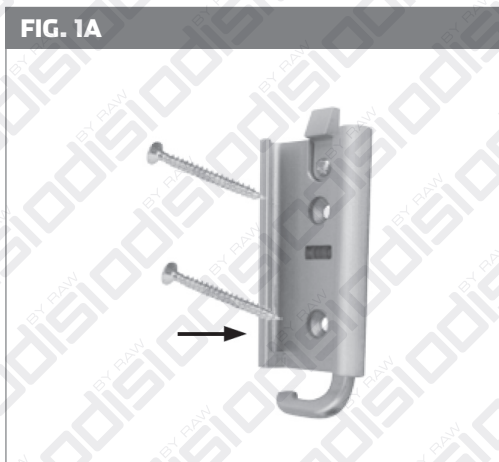


FIG. 1B

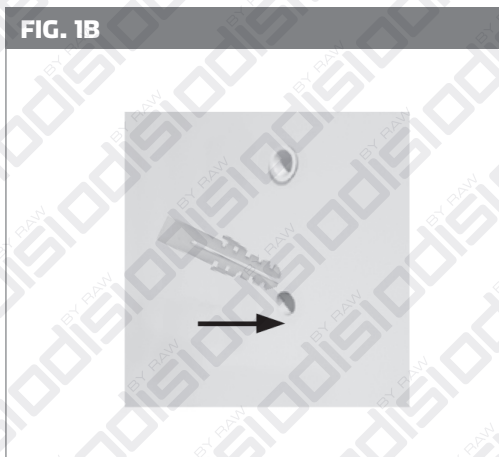

STEP 2: ATTACHING THE ARM TO THE LCD

IMPORTANT: Make sure the LCD is unplugged before starting this step of the installation and never lay the LCD face down as this may damage the viewing surface.

Before attaching the arm piece of the mount to your LCD, you must first determine which hardware to use. Do this by examining the back of the LCD. If your LCD has a flat back, use the M4x12mm Bolts (C). If your LCD has a recessed back, use the longer M4x30mm Bolts (D) and 3/4" Spacers (E). After you have determined the appropriate bolts, use them to attach the arm piece of the mount to the back of your LCD. Be careful not to over-tighten the bolts.

FIG. 2



STEP 3: FINAL INSTALLATION AND OPERATION

Final Installation

To complete the installation, simply slide the arm piece with your LCD attached into the wall piece. The plastic tab on the top of the wall piece should click indicating that the arm piece is secure. If you need to remove the arm piece, push in on the tab and slide the arm up. For additional security and stability, insert the security bolt (F) into the hole located on base of the arm piece and tighten using the Allen Wrench (G) provided.

Operation and Adjustment

NOTE: Adjustment of your LCD may vary by model.

On most models, the tilt angle of your LCD is adjustable. To adjust the tilt, first locate the adjustment knob directly behind the LCD mounting point. Loosen it by turning the knob counter-clockwise. Adjust the tilt to the desired level and re-tighten the knob to lock the adjustment in place (see illustration). Other viewing adjustments can be made by simple moving the arm into the desired position. If you find that a joint is too tight or too loose, you can adjust the tightness of that joint. To do this, first examine the joint. If your mount includes an adjustment knob at the joint, turn the knob clockwise to tighten and counter-clockwise to loosen. If your mount does not have a knob, use the Allen Wrench (G) from your hardware kit to tighten or loosen the nut at the joint.

FIG. 3A



FIG. 3B

